


HDS STATIONARY - NG / LP



Innovation inside and out.

The innovative, rugged design of the Kärcher Classic HDS natural gas and LP-heated cabinet pressure washer delivers up to 5 gpm at 3,000 psi of industrial power. Built in the U.S.A., each model is constructed with anodized structural rivets, a water cooled electric motor, standard auto start/stop and Kärcher's axial direct-drive pump backed by a 7-year warranty. All models are ETL certified to UL and CSA safety standards.

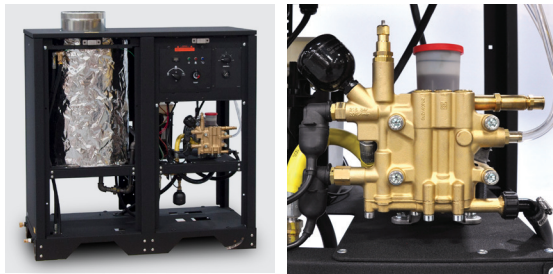

Features

- Integrated RM 110 reservoir and steam stage
- Inlet/outlet connections can be moved to either side of the unit
- Auto start-stop for on-demand cleaning
- EASY!Force gun with cruise control like technology - uses its own recoil force to hold the trigger down
- "Stay-in-Place" ignition pilot light with swing out burner ring
- Cool wall cabinet construction and pulsation damper

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	HP	Electrical	Amps	Pump	Ship Weight (lbs)	BTU	Ship Dimensions (L x W x H) Inches
Natural Gas											
HDS 3.5/23 Eg ST NG	1.109-797.0	3.5	2300	Direct	8.1	208V / 1ph	26	Kärcher Axial / 1725	695	310000	49 x 24 x 48
HDS 4.5/22 Ea ST NG	1.109-722.0	4.5	2200	Direct	9.5	230V / 1ph	30	Kärcher Axial / 1725	695	393000	49 x 24 x 48
HDS 3.5/30 Ea ST NG	1.109-729.0	3.5	3000	Direct	9.5	230V / 1ph	27	Kärcher Axial / 1725	695	310000	49 x 24 x 48
HDS 5.0/30 Eb ST NG	1.109-742.0	5.0	3000	Direct	11	230V / 3ph	27	Kärcher Axial / 1725	700	398000	49 x 24 x 48
LP Gas-Heated											
HDS 3.5/23 Eg ST LP	1.109-798.0	3.5	2300	Direct	8.1	208V / 1ph	26	Kärcher Axial / 1725	695	310000	49 x 24 x 48
HDS 4.5/22 Ea ST LP	1.109-763.0	4.5	2200	Direct	9.5	230V / 1ph	30	Kärcher Axial / 1725	695	393000	49 x 24 x 48
HDS 3.5/30 Ea ST LP	1.109-770.0	3.5	3000	Direct	9.5	230V / 1ph	27	Kärcher Axial / 1725	695	310000	49 x 24 x 48
HDS 5.0/30 Eb ST LP	1.109-783.0	5	3000	Direct	11	230V / 3ph	27	Kärcher Axial / 1725	700	398000	49 x 24 x 48

ACCESSORIES

Order No.	Description
■ 4.118-005.0 ■	EASY!Force trigger gun (German model) - zero force required.
□ 2.744-008.0	Remote Kit single station
□ 6.685-195.0	Chemical solenoid valve (brass) for use with remote kit
□ 8.708-846.0	Chemical solenoid valve (stainless steel) for use with remote kit
□ 9.801-040.0	Draft diverter, 10"
□ 8.753-474.0	Damper, draft 10"
□ 8.925-154.0	Hose 3/8" x 50", 4000 PSI
□ 2.639-919.0	Self-winding hose reel, 66'
□ 2.639-931.0	Swivel wall mount bracket
□ 8.923-213.0	Hot water discharge outlet relocation

■ Included □ Optional ■ Compatible with EASY!Lock

Specifications, product descriptions and product availability subject to change without notice.